


JUMBO DISPLAY THERMOMETER/HYGROMETER

maximum and minimum temperature/humidity records with optional daily reset feature

FEATURES

- 2 rows Big digits LCD display.
- Indoor temperature and humidity display at the same time.
- °C or °F range selectable at any time.
- Maximum and Minimum temperature and humidity memory function.
- DAILY reset of maximum and minimum records function with internal clock.
- Temperature measuring range : -10°C to +50°C (+23°F to +122°F) with 0.1°C(°F) resolution.
Humidity measuring range : 20 - 99% with 1 % resolution.

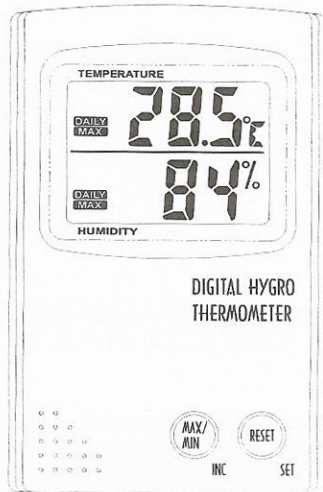

INSTALLING AND REPLACING THE BATTERY

The thermometer uses one 'AAA' size battery (1.5V DC),
Follow these steps to install or replace the battery:

1. Open the battery cover, below the stand.
2. Insert the battery as indicated by the polarity symbols (+ and -) marked inside the battery compartment.
3. Replace the battery cover.

OPERATION

TEMPERATURE AND HUMIDITY MEASURE

This unit will measure the temperature and humidity continuously unless the user is setting the clock for daily function. The temperature will be displayed in °C or °F unit. The unit can be selected by switching the °F/°C slide switch at the back of the unit.

DISPLAY

1. The upper and lower display shows temperature and humidity respectively. The user can view the maximum and minimum temperature/humidity records by pressing MAX/MIN key. If the current temperature is above or below the measureable range, the HHH or LLL will be shown.
2. When the user set the internal clock, the upper and lower LCD display shows Hour and Minute respectively.

RECALL MAXIMUM AND MINIMUM TEMPERATURE/HUMIDITY RECORDS

The user can recall the maximum and minimum temperature/humidity records by pressing the MAX/MIN key. To recall them, the user can follow these steps:

1. When the current temperature/humidity is displaying, Press the MAX/MIN key to view the maximum temperature in the upper LCD display and maximum humidity in the lower LCD display. Press RESET key to reset the maximum record to the current temperature/humidity.
2. Press the MAX/MIN key again to view the minimum temperature in the upper LCD display and minimum humidity in the lower LCD display. Press RESET key to reset the minimum record to the current temperature/humidity.
3. Press the MAX/MIN key again, the current temperature and humidity will be shown in the upper and lower LCD display respectively.

DAILY MAXIMUM AND MINIMUM TEMPERATURE/HUMIDITY RECORDS RESET

This function guaranteed the maximum and minimum temperature/humidity records are measured within the current day. If the user concern the maximum and minimum temperature/humidity of the current day, he/she could enable the function by setting the DAILY slide switch at the back of the unit to ENABLE. The maximum and minimum temperature/humidity records will be reset to the current temperature/humidity at 0:00 everyday. There is an internal clock for this function, the user can set the internal clock by following these step:

1. When the current temperature are displayed, press the **SET** key for about 2 seconds, the upper and lower LCD display shows the Hour and Minute respectively with Hour digits blinking.
2. Press **INC** key to adjust the hour digits or press and hold the key to advance the digits continuously.
3. Press the **SET** key again, the Minute digits blinks.
4. Press **INC** key to adjust the minute digits or press and hold the key to advance the digits continuously in 5 increments step.
5. The user can exit the setting mode by pressing the **SET** key again or it exit automatically if no key is pressed for 1-2 minute(s).

USE OF THE SUPPLIED STAND

Flip out the plastic stand on the rear of the unit for table standing. Stand the unit on a flat surface.

WALL-MOUNTING THE UNIT

Follow these steps to mount the unit on the wall:

1. Drive a screw into the wall at the desired location until the head extends 3.5mm from the wall.
2. Locate into the hanger slot on the back of the thermometer until it locks into place.

DESIGN AND SPECIFICATIONS ARE SUBJECTED TO CHANGE WITHOUT NOTICE.